

ApeosPort-V / DocuCentre-V


C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275



# ApeosPort-V / DocuCentre-V T2

C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275  
Digital Colour Multifunction Device

A new standard in flexibility and efficiency  
to allow you to work smarter

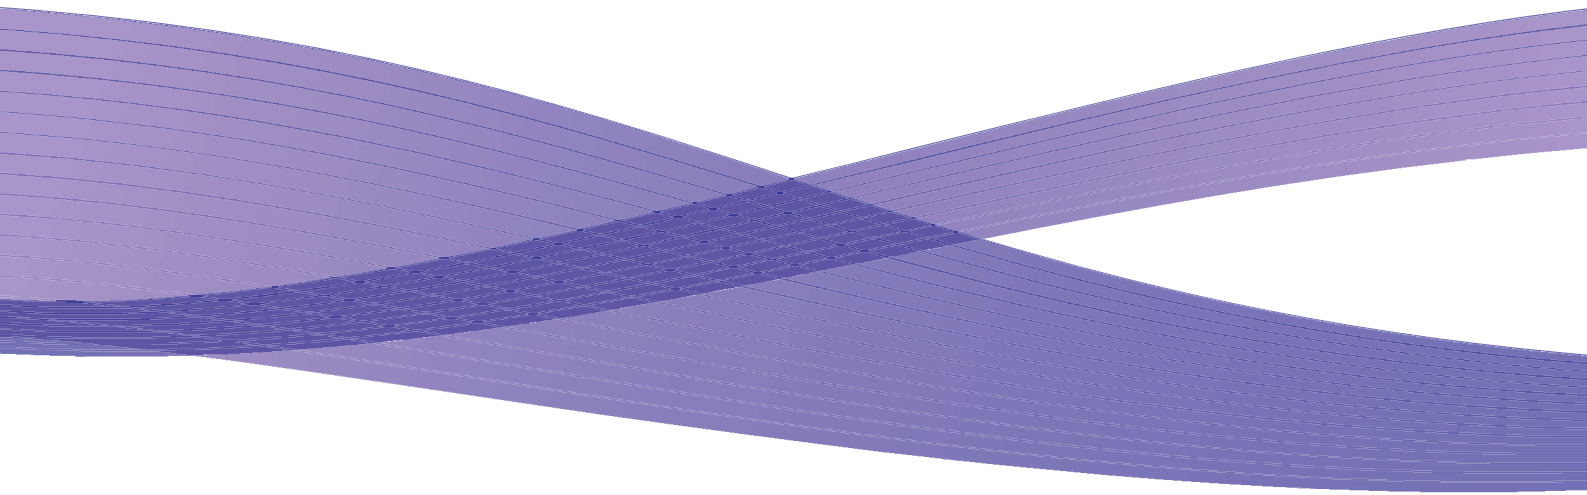

If an organisation is to prosper, it must provide an environment in which every person can work towards a common goal, yet meet their own values and aspirations.

Individuals need their own space — a place they can comfortably work, where they can find value in their efforts, and where they can flourish in a pleasant environment.

Fuji Xerox understands that. We have designed the new ApeosPort-V/DocuCentre-V series so that they can recognise individuals, provide them with the specific tools they need to work effectively, and contribute to a quieter, more congenial environment.

We are working with you to help you reach your full potential.

**The ApeosPort-V/DocuCentre-V C7775/C6675/C5575/C4475/C3375/C3373/C2275 series of multifunction devices deliver higher customer satisfaction through: Innovation, Cost Efficiency, Productivity and Sustainability**



# ApeosPort-V/DocuCentre-V

## C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

The photo is of the ApeosPort-V C7775 CPS model

# Specifications of ApeosPort-V/ DocuCentre-V C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

## Basic Specifications/Copy Function

Item	AP-V / DC-V C7775	AP-V / DC-V C6675	AP-V / DC-V C5575	AP-V / DC-V C4475	AP-V / DC-V C3375	AP-V / DC-V C3373	AP-V / DC-V C2275
Type	Console						
Memory Capacity	4 GB (Max. 4 GB)						
Hard Disk Capacity*1	160 GB or larger (Usable space: 128 GB)						
Colour Capability	Full colour						
Scan Resolution	600 x 600 dpi						
Print Resolution	1200 x 2400 dpi (High Resolution Photo), 600 x 600 dpi (Text/Text-Photo/Photo/Map)						
Warm-up Time	30 seconds or less (At room temperature 20 °C). 24 seconds or less if the main power is on (At room temperature 20 °C)						
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book						
Paper Size	Max	SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm) when using Bypass Tray]					
	Min	A5 [Postcard and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray]					
	Image loss width	Lead edge 4 mm or less, trail edge 2 mm or less, and right&left 2 mm or less					
Paper Weight*2	Paper Tray	52 - 300 gsm					
	Bypass Tray	52 - 300 gsm					
First Copy Output Time*3	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:
	3.3 sec.	3.3 sec.	3.7 sec.	4.4 sec.	4.9 sec.	4.9 sec.	6.6 sec.
	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:
	4.1 sec.	4.1 sec.	5.2 sec.	5.7 sec.	6.4 sec.	6.4 sec.	8.7 sec.
	A4 LEF/ B5 LEF	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:
	70 ppm	65 ppm	55 ppm	45 ppm	35 ppm	30 ppm	25 ppm
	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:
	70 ppm	65 ppm	50 ppm	45 ppm	35 ppm	30 ppm	25 ppm
A4/B5	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:	
50 ppm	46 ppm	39 ppm	32 ppm	27 ppm	23 ppm	19 ppm	
Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	
50 ppm	46 ppm	36 ppm	32 ppm	27 ppm	23 ppm	19 ppm	
B4	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:	
40 ppm	37 ppm	32 ppm	26 ppm	23 ppm	20 ppm	16 ppm	
Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	
40 ppm	37 ppm	29 ppm	26 ppm	23 ppm	20 ppm	16 ppm	
A3	B/W:	B/W:	B/W:	B/W:	B/W:	B/W:	
35 ppm	32 ppm	27 ppm	22 ppm	20 ppm	17 ppm	14 ppm	
Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	Colour:	
35 ppm	32 ppm	25 ppm	22 ppm	20 ppm	17 ppm	14 ppm	
Paper Tray Capacity*5	Standard	[ C7775/C6675/C5575/C4475/C3375/C3373/C2275 ] 500 sheets x 2 Tray + 867 sheets + 1133 sheets + Bypass Tray 90 sheets [ C5575/C4475/C3375/C3373/C2275 ] 4 Tray Model: 500 sheets x 4 Tray + Bypass Tray 90 sheets					
	Optional	HCF B1: 2030 sheets					
	Max.	[ C7775/C6675/C5575/C4475/C3375/C3373/C2275 ] 5120 sheets (Tandem Tray Model + High Capacity Feeder B1) [ C5575/C4475/C3375/C3373/C2275 ] 4120 sheets (4 Tray Model + High Capacity Feeder B1)					
Output Tray Capacity*6	250 sheets (A4 LEF), 125 sheets (A3)						
Power Source	AC220-240 V±10%, 10A, 50/60 Hz common		AC220-240 V±10%, 10A, 50/60 Hz common				
Power Consumption	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)	2.2 kW or less (AC220 V±10%) 2.4 kW or less (AC240 V±10%)
	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 119 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less	Sleep mode: 1.3 W or less (AC220 V±10%) Ready Mode: 105 W or less
	Ready Mode: 119 W or less	Ready Mode: 105 W or less	Ready Mode: 105 W or less	Ready Mode: 105 W or less	Ready Mode: 105 W or less	Ready Mode: 105 W or less	Ready Mode: 105 W or less
Dimensions	[ C7775/C6675/C5575/C4475/C3375/C3373/C2275 ] W 640 x D 699 x H 1143 mm (when Duplex Automatic Document Feeder B1-PC is installed) [ C3375/C3373/C2275 ] W 640 x D 699 x H 1128 mm (when Duplex Automatic Document Feeder B1-C is installed)						
	148 kg (With Duplex Automatic Document Feeder B1-PC)	135 kg*8 (With Duplex Automatic Document Feeder B1-PC)	130 kg*8 (With Duplex Automatic Document Feeder B1-C)				

\*1: Not all of the hard disk capacity is actually available for users. \*2: Use Fuji Xerox recommended paper. Documents may not be printed correctly depending on usage conditions. \*3: B/W: A4 LEF/Monochrome priority mode, Colour: A4 LEF/Colour priority mode \*4: The speed may be reduced due to the image quality adjustment. \*5: 80 gsm Paper. \*6: 64 gsm paper. \*7: Excluding Toner Cartridge. \*8: With the 3 Tray Module

## HCF B1 (Optional)

Item	Description
Paper Size / Paper Weight	A4 LEF, Letter LEF, B5 LEF, 55 - 216 gsm
Feeding Capacity*1 / Number of Tray	2030 sheets x 1 Tray
Dimensions / Weight	W 389 x D 610 x H 380 mm, 29 kg
Space Requirement (When connected to the main unit)*2	W 1064 mm x D 699 mm

\*1: 80 gsm paper. \*2: Main Unit + HCF B1; When the Bypass tray is fully extended and the stopper of DADF is turned on.

## Print Function

Item	Description	
Type	Built-in type	
Print size*1	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm), 320x1200 mm*1 when using Bypass Tray] Min: A5 [Postcard (100 x 148 mm) and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray] Image loss width: Lead edge 4 mm or less, trail edge 2 mm or less, and right & left 2 mm or less	
Continuous Print Speed*2	Same as the Basic Specifications / Copy Function	
Print Resolution	Output Resolution	1200 x 1200 dpi, 1200 x 2400 dpi
	Data Process Resolution	Standard: 600 x 600 dpi, High Resolution: 600 x 600 dpi, High Definition: 1200 x 1200 dpi
PDL	Standard	PCL5/ PCL6
	Optional	Adobe® PostScript® 3™
Supported Operating System*3	Standard	[PCL6] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit), Windows® 8.1 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) Windows® 8.1 (64-bit), Windows Server® 2012 R2 (64-bit) [Mac OS X Driver] Mac OS X 10.5/10.6/10.7, OS X 10.8/10.9
	Optional	[Adobe® PostScript® 3™ Driver] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit), Windows® 8.1 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) Windows® 8.1 (64-bit), Windows Server® 2012 R2 (64-bit) Mac OS X 10.5/10.6/10.7, OS X 10.8/10.9
Interface	Standard	Ethernet 100BASE-TX/10BASE-T, USB2.0
	Optional	Ethernet 1000BASE-T, Bidirectional Parallel (IEEE1284-B)

\*1: Long paper of 106 to 256 gsm is available. Long paper is not available when finisher is attached.  
\*2: The speed may be reduced due to the image quality adjustment. The speed may also be reduced depending on the document attributes. \*3: See our official website for the latest supported OS.

## Scan Function

Item	AP-V / DC-V C7775	AP-V / DC-V C6675	AP-V / DC-V C5575	AP-V / DC-V C4475	AP-V / DC-V C3375	AP-V / DC-V C3373	AP-V / DC-V C2275
Type	Colour Scanner						
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi						
Original Scanning Speed*1	Duplex Automatic Document Feeder B1-C	NA				B/W: 70 ppm, Colour: 70 ppm [Fuji Xerox standard paper (A4 LEF), 200 dpi, to confidential box.]	
	Duplex Automatic Document Feeder B1-PC*2	B/W: 80 ppm Colour: 80 ppm				NA	
		1 pass, 2 sided scanning B/W: 160 ppm*3 Colour: 160 ppm*3					
Interface	Standard	Ethernet 100BASE-TX/10BASE-T					
	Optional	Ethernet 1000BASE-T					

\*1: The scanning speed varies depending on the documents. \*2: Simplex scanning speed of Duplex Automatic Document Feeder B1-PC is reduced when Paper Security Function is enabled. \*3: 160 ppm for both B/W and colour when Quiet Mode is disabled. This setting can be changed to suit the customer's usage.

## Fax Function (Optional)

Item	Description
Document Size	Max: A3, 11 x 17", Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), maximum 3 ports *2 (G3-3 port)

\*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. \*2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

## Side Tray (Optional)

Item	Description
Paper Size / Paper Weight	Same as the Basic Specifications / Copy Function
Paper Capacity*1	100 sheets
Dimensions / Weight	W 353 x D 469 x H 198 mm, 1 kg
Space Requirement (When connected to the main unit)*2	W 1064 x D 699 mm

\*1: 64 gsm paper. \*2: Main Unit + Side Tray; When the Bypass tray is fully extended and the stopper of DADF is turned on.

## Duplex Automatic Document Feeder B1-C

Item	AP-V / DC-VC3375	AP-V / DC-V C3373	AP-V / DC-V C2275
Original Size / Paper Weight	Max: A3, 11 x 17"; Min: A5* <sup>1</sup> 38 - 128 gsm (In Duplex: 50 - 128 gsm)		
Capacity* <sup>2</sup>	110 sheets		
Feeding Speed (A4 LEF Simplex)	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
Dimensions / Weight	W 560 x D 498 x H 125 mm, 8 kg		

\*1: Nonstandard size single-sided mode: 125 x 85 mm. \*2: 64 gsm paper.

## Duplex Automatic Document Feeder B1-PC (Optional)

Item	AP-V / DC-V C7775	AP-V / DC-V C6675	AP-V / DC-V C5575	AP-V / DC-V C4475	AP-V / DC-V C3375	AP-V / DC-V C3373	AP-V / DC-V C2275
Original Size / Paper Weight	Max: A3, 11 x 17"; Min: A5* <sup>1</sup> 38 - 128 gsm (In Duplex: 50 - 128 gsm)						
Capacity* <sup>2</sup>	130 sheets						
Feeding Speed (A4 LEF Simplex)	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 55 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
Dimensions / Weight	W 560 x D 498 x H 140 mm, 11 kg						

\*1: Nonstandard size single-sided mode: 125 x 85 mm. \*2: 64 gsm paper.

## Finisher-A1 (Optional)

Item	Description	
Type	Sort (Offset available) / Stack (Offset available)	
Paper Size	Max: A3, 11 x 17"; Min: Postcard	
Paper Weight* <sup>1</sup>	52 - 220 gsm	
Paper Capacity* <sup>2</sup>	[Without Stapling] A4: 500 sheets; B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking* <sup>3</sup> : 250 sheets [With Stapling] 30 copies	
Staple	Capacity	A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less)
	Paper Size	Max: A3, 11 x 17"; Min: B5 LEF
	Position	Single stapling (Front/Angled)
Dimensions / Weight	W 559 x D 448 x H 246 mm, 12 kg	

\*1: Documents may not be printed correctly depending on usage conditions. (52 - 55 gsm) \*2: 64 gsm paper. \*3: When larger size sheets are stacked on top of smaller size sheets. Note: The unit cannot be installed on ApeosPort-V/ DocuCentre-V C7775/C6675/C5575/C4475.

## Finisher-B1 (Optional)

Item	Description	
Type	Sort (Offset available) / Stack (Offset available)	
Paper Size* <sup>1</sup>	Max: A3, 11 x 17"; Min: B5 LEF	
Paper Weight* <sup>2</sup>	52 - 220 gsm	
Paper Capacity* <sup>3</sup>	[Without Stapling] A4: 2000 sheets; B4 or larger: 1000 sheets; Mixed Size Stacking* <sup>4</sup> : 300 sheets [With Stapling] A4: 100 copies or 1000 sheets* <sup>5</sup> , B4 or larger: 75 copies or 750 sheets [With Booklet Finishing]* <sup>6</sup> 50 copies or 600 sheets [With Scoring]* <sup>6</sup> 500 sheets	
Staple	Capacity	50 sheets (90 gsm or less)
	Paper Size	Max: A3, 11 x 17"; Min: B5 LEF
	Position	Single stapling (Front/Angled, Back/Straight) or dual stapling (Parallel)
Punch* <sup>7</sup>	Number of Holes	2/4 hole punch or 2/3 hole punch (US Specifications)
	Paper Size	A3, 11 x 17"; B4, A4, A4 LEF, Letter, Letter LEF, B5 LEF
	Paper Weight	55 - 200 gsm
Booklet Finishing* <sup>6</sup>	Capacity	Saddle Staple: 15 sheets; Scoring: 5 sheets
	Paper Size	Max: A3, 11 x 17"; Min: A4, Letter
	Paper Weight	Saddle Staple: 64 - 80 gsm, Scoring: 64 - 105 gsm
Dimensions* <sup>8</sup> / Weight	W 620 x D 552 x H 987 mm, 28 kg With Booklet Finisher: W 620 x D 597 x H 1057 mm, 37 kg	

\*1: Paper in the sizes larger than A3 or 11 x 17" or smaller than B5 are delivered to the Center Tray. \*2: Documents may not be printed correctly depending on usage conditions. (52 - 55 gsm) \*3: 64 gsm paper. \*4: When larger size sheets are stacked on top of smaller size sheets. \*5: 75 sets or 750 sheets with dual stapling. \*6: The Booklet Finishing function requires the Booklet Maker Unit for Finisher-B1. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. \*7: The Punch function requires the 2/4 Hole Punch Kit for Finisher-B1 or US 2/3 Hole Punch Kit for Finisher-B1. \*8: Inner connector within the body is excluded. Note: The unit cannot be installed on ApeosPort-V/ DocuCentre-V C7775/C6675.

## Folder Unit CD1 (Optional)

Item	Description	
Paper Size	Z Fold Half Sheet	A3, 11 x 17", B4
	Tri-fold	A4, Letter
Paper Weight	Z Fold Half Sheet	60 - 90 gsm
	Tri-fold	60 - 90 gsm
Paper Capacity* <sup>1</sup>	Tri-fold	40 sheets
Power Source* <sup>2</sup> / Power consumption	AC220-240 V +/- 10%, 0.6A, 50/60 Hz common, 144 W or less	
Dimensions / Weight	W 232 x D 726 x H 991 mm, 53 kg or less	

\*1: 64 gsm paper \*2: Power supply separate from the main unit is required.

## C3 Finisher (Optional)

Item	Description	
Type	Output Tray	Sort / Stack
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
Paper Size* <sup>1</sup>	Output Tray	Max: 12 x 19" (305 x 483 mm), Min: Postcard (100 x 148 mm)
	Finishing Tray	Max: 12 x 19" (305 x 483 mm), Min: B5
Paper Weight* <sup>2</sup>	Output Tray	52 - 300 gsm
	Finishing Tray	52 - 300 gsm
Paper Capacity* <sup>3</sup>	Output Tray	500 sheets (A4)
	Finishing Tray	[Without Stapling] A4: 3000 sheets; B4 or larger: 1500 sheets; Mixed Size Stacking* <sup>4</sup> : 300 sheets [With Stapling] A4: 200 sets or 3000 sheets; B4 or larger: 100 sets or 1500 sheets; Mixed Size Stacking* <sup>4</sup> : 70 sets or 200 sheets
Staple	Capacity	50 sheets (90 gsm or less)* <sup>5</sup>
	Paper Size	Max: A3, 11 x 17"; Min: B5
	Position	Single stapling (front/back, angled), dual stapling (parallel)
Punch	Number of Holes	2/4 hole punch or 2/3 hole punch (US Specifications)
	Paper Size	A3, 11 x 17", B4, A4* <sup>6</sup> , A4 LEF, Letter* <sup>6</sup> , Letter LEF, B5 LEF, 7.25 x 10.5", 8 x 10", 16K, Cover A4, 9 x 11", 215 x 315 mm, 8.5 x 13", Legal (8.5 x 14"), 11 x 15", 8K
	Paper Weight	52 - 200 gsm
Dimensions* <sup>7</sup> / Weight	W 730 x D 589 x H 1056 mm, 44 kg W 965 x D 726 x H 1056 mm, 98 kg (when Folder Unit CD1 and Punch Unit are installed)	

\*1: Paper less than B5 size is delivered from the Center Tray. \*2: Documents may not be printed correctly depending on usage conditions. (52 - 55 gsm) \*3: 64 gsm paper. \*4: When larger size sheets are stacked on top of smaller size sheets. \*5: Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur. \*6: 3-hole punch is not applicable. \*7: Inner connector within the body is excluded. Note: C3 Finisher requires Transport Unit H1.

## C3 Finisher with Booklet Maker (Optional)

Item	Description	
Type	Output Tray	Sort/Stack
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	Sort/Stack
Paper Size* <sup>1</sup>	Output Tray	Max: 12 x 19" (305 x 483 mm); Min: Postcard
	Finishing Tray	Max: 12 x 19" (305 x 483 mm); Min: B5
	Booklet Tray	Max: 12 x 18" (305 x 457 mm); Min: B5
Paper Weight* <sup>2</sup>	Output Tray	52 - 300 gsm
	Finishing Tray	52 - 300 gsm
	Booklet Tray	60 - 105 gsm* <sup>3</sup>
Paper Capacity* <sup>4</sup>	Output Tray	500 sheets (A4)
	Finishing Tray	[Without Stapling] A4: 1500 sheets; B4 or larger: 1500 sheets; Mixed Size Stacking* <sup>5</sup> 300 sheets [With Stapling] A4: 200 sets or 1500 sheets; B4 or larger: 100 sets or 1500 sheets; Mixed Size Stacking* <sup>5</sup> : 70 sets or 200 sheets
	Booklet Tray	20 sets* <sup>6</sup>
Staple	Capacity	50 sheets (90 gsm or less)* <sup>7</sup>
	Paper Size	Max: A3, 11 x 17"; Min: B5 LEF
	Position	Single stapling (front/back, angled), dual stapling (parallel)
Punch	Number of Holes	2/4 hole punch or 2/3 hole punch (US Specifications)
	Paper Size	A3, 11 x 17", B4, A4* <sup>8</sup> , A4 LEF, Letter* <sup>8</sup> , Letter LEF (8.5 x 11"), B5 LEF, 7.25 x 10.5", 8 x 10", 16K, Cover A4, 9 x 11", 215 x 315 mm, 8.5 x 13", Legal (8.5 x 14"), 11 x 15", 8K
	Paper Weight	52 - 200 gsm
Booklet Finishing	Capacity	Saddle Staple: 16 sheets* <sup>9</sup> ; Fold: 5 sheets; Single Fold: 1 sheet
	Paper Size	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm); Min: B5
	Paper Weight	Saddle Staple: 60 - 105 gsm* <sup>10</sup> * <sup>11</sup> ; Middle-Fold: 60 - 105 gsm* <sup>10</sup> ; Single Fold: 60 - 105 gsm
Dimensions* <sup>12</sup> / Weight	W 790 x D 589 x H 1056 mm, 61 kg W 1,025 x D 726 x H 1056 mm, 115 kg (when Folder Unit CD1 and Punch Unit are installed)	

\*1: Paper less than B5 size is delivered from the Center Tray. \*2: Documents may not be printed correctly depending on usage conditions. (52 - 55 gsm) \*3: Cover sheets can be up to 256 gsm. \*4: 64 gsm paper. \*5: When larger size sheets are stacked on top of smaller size sheets. \*6: When the output paper size is the same. \*7: Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur. \*8: 3-hole punch is not applicable. \*9: Saddle Staple capacity varies depending on how heavy the cover is. Booklet may not be tightly dosed depending on the size or type of the paper. \*10: Covers can be up to 256 gsm (Thick Paper 2) for saddle staple during printing. \*11: Printed covers can be up to 169 gsm (Thick Paper 1) for middle-fold or saddle staple during copying, while blank covers can be up to 256 gsm (Thick Paper 2). \*12: Inner connector within the body is excluded. Note: C3 Finisher with Booklet Maker requires Transport Unit H1.